

SG 32

SG 32 is a smaller version of the SG 64, with 31 probes (+ 1 reference channel). Two models are available: the SG 32 - 18 GHz, and the SG 32 - 6 GHz. Both have the capacity to switch between the N-PAC for antenna measurements and the Radio Communication Tester for OTA measurements. SG 32 can perform both CTIA comparable TRP and TIS measurements.



**Compact dimensions - perfect for test labs with low ceiling heights**

SOLUTION FOR

- Antenna Measurement
- OTA Testing
- MIMO Measurement

## Main features

### Technology

- Near-field / Spherical

### Measurement capabilities

- Gain
- Directivity
- Beamwidth
- Cross polar discrimination
- Sidelobe levels
- Front to back ratio
- 1D, 2D and 3D radiation patterns
- Radiation pattern in any polarization (linear or circular)
- Antenna efficiency
- TRP, TIS, EIRP and EIS

### Frequency bands

- SG 32 - 6 GHz: 650 MHz to 6 GHz
- SG 32 - 18 GHz: 650 MHz to 18 GHz

### Max. size of DUT

- 84 cm

### Max. weight of DUT

- 200 kg

### Typical dynamic range

- 70 dB

### Oversampling

- Elevation tilt of the DUT

## System configurations

### Software

Measurement control, data acquisition and post processing

- SatEnv

Near-field/far-field transform

- SatMap

OTA measurement suite

- SAM
- SMM

Advanced post processing

- SatSIM
- Insight

### Equipment

- Amplification unit
- Mixer unit
- N-PAC
- Uninterruptible power supply
- Instrumentation rack
- DUT positioner
- Primary synthesizer
- Auxiliary synthesizer

### Add-ons

- Shielded anechoic chamber\*

OTA Equipment

- Radio communication tester
- Active switching unit
- MIMO upgrade

### Accessories

- Styrofoam mast
- Acquisition PC & touch screen PC
- Hand and head phantoms
- Laptop interface
- Ultra rigid mast
- Positioning laser pointer
- Reference antennas (horns, sleeve dipoles, loops)


### Services

- Installation and calibration
- Warranty
- Project management
- Training
- Post warranty service plans

\* See MVG-EMC Systems catalogs for more information

■ Included □ Optional ○ Required


System overview

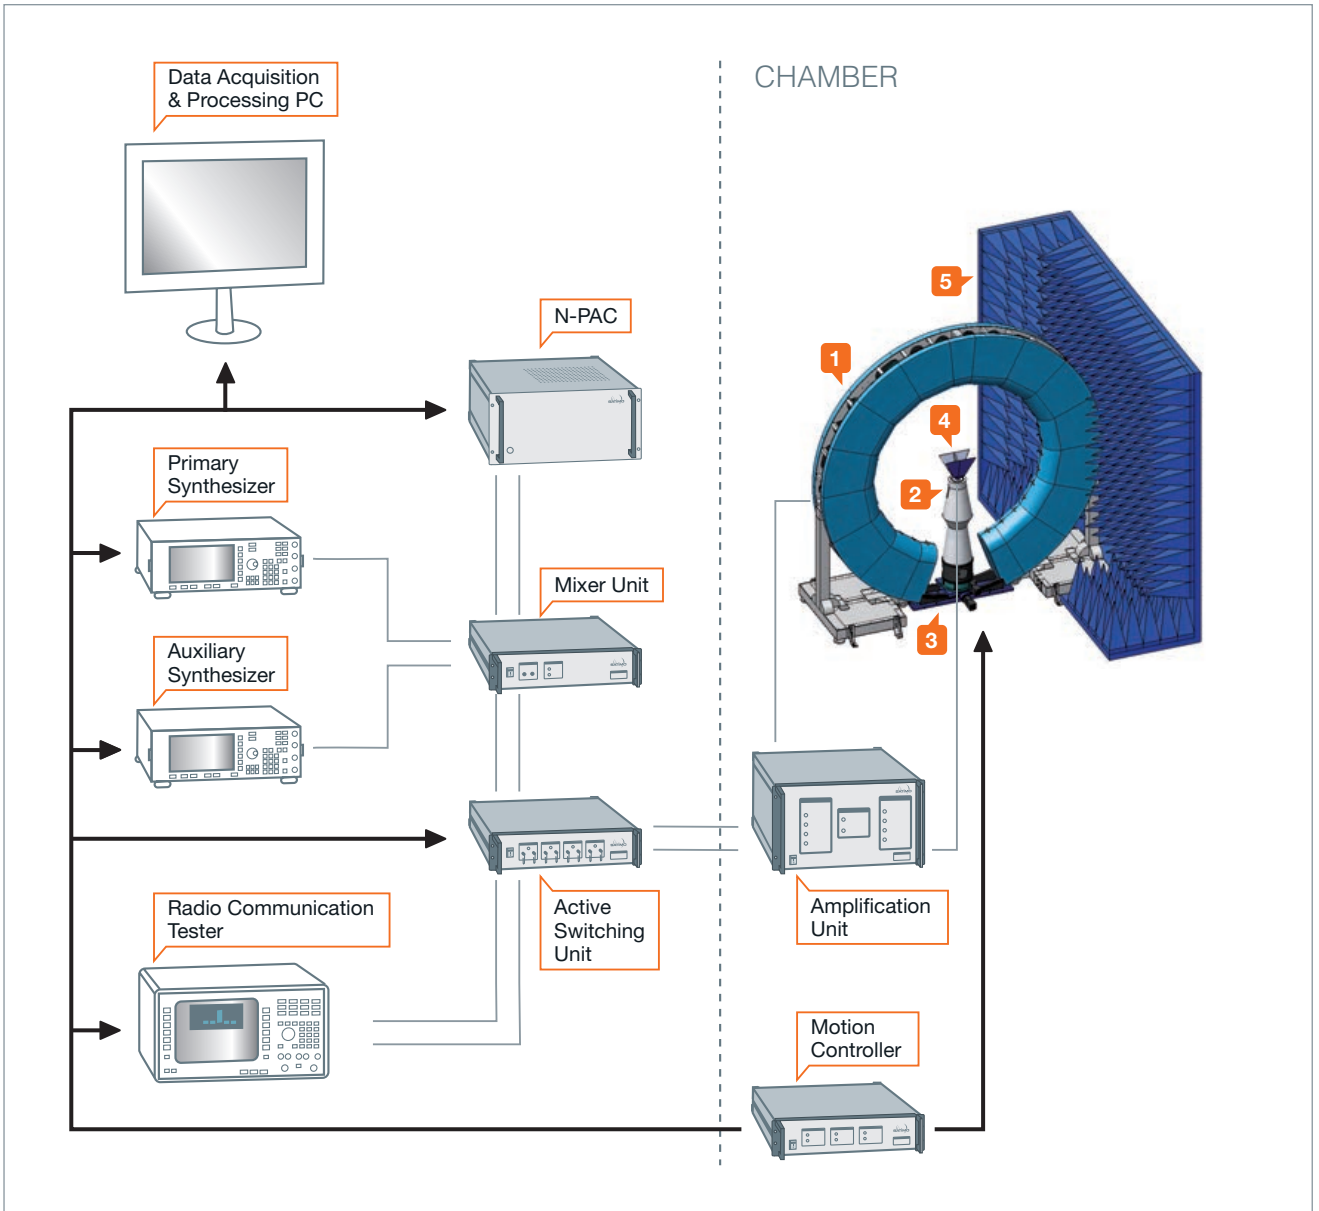

SG 32 system can switch between the N-PAC for antenna measurements and the Radio Communication Tester for OTA measurements. For antenna measurements, it uses Analog RF Signal Generators to emit from the probe array to the Antenna Under Test or vice versa. The N-PAC is also a RF receiver for antenna measurements and controls the

electronic scanning of the probe array. For OTA measurements, the tests are performed through several different Radio Communication Testers. The Amplification Unit has RF amplifiers for each of the RX and TX channels. They are used to communicate with the DUT and measure the Total Radiated Power (TRP) and Total Isotropic Sensitivity (TIS).

## Standard system components




### 1 Arch

- A choice of 2 probes can be interleaved (DP 400-6000, DP 6000-18000)




### 2 Mast

- 2 masts according to max. weight of DUT
- Laptop interface



### 3 Patented Goniometer


- Goniometers are used to calibrate the system and perform oversampling.
- A choice of goniometers depending on the size of the arch, the max. weight of the DUT and the frequency range



### 4 Antennas

- A choice of reference antennas (horns, dipoles and loops)


 MVG antenna catalog



### 5 Absorbers and anechoic chambers

- A choice of standard, adapted and specialty absorbers
- Anechoic chambers with integrated design, production, installation and testing services

 AEMI absorber catalog

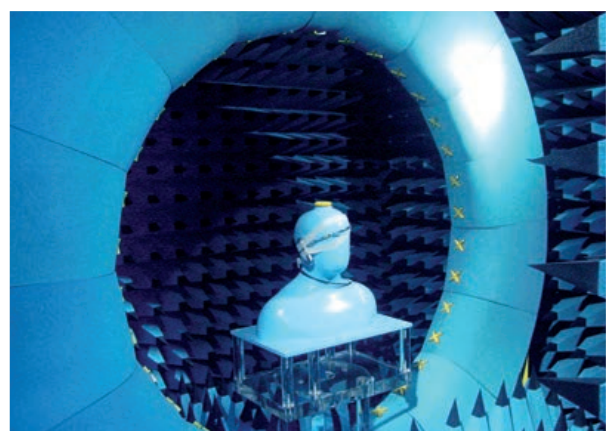

SG 32 with head phantom



SG 32 18 GHz version

### SG 32 - 18 GHz version

For the 0.8 GHz to 18 GHz version, two probe arrays are interleaved, one with 0.8 - 6 GHz probes and the other with 6 - 18 GHz probes. SG 32 - 18 GHz has the same capabilities as the standard 6 GHz version.

## System specifications\*

	SG 32 - 6 GHz			SG 32 - 18 GHz		
Measurement time for 11 frequencies**	< 2 min			< 2 min		
Typical dynamic range	70 dB			70 dB		
	10 dBi AUT	20 dBi AUT	30 dBi AUT	10 dBi AUT	20 dBi AUT	30 dBi AUT
<b>PEAK GAIN ACCURACY</b>						
0.8 GHz - 1 GHz	± 0.9 dB	± 0.7 dB	-	± 0.9 dB	± 0.7 dB	-
1 GHz - 6 GHz	± 0.8 dB	± 0.7 dB	± 0.6 dB	± 0.8 dB	± 0.7 dB	± 0.6 dB
6 GHz - 18 GHz	-	-	-	± 0.8 dB	± 0.7 dB	± 0.6 dB
Peak gain repeatability	± 0.3 dB	± 0.3 dB	± 0.3 dB	± 0.3 dB	± 0.3 dB	± 0.3 dB
<b>- 10 dB SIDELOBES ACCURACY</b>						
0.8 GHz - 1 GHz	± 1.0 dB	± 0.6 dB	-	± 1.0 dB	± 0.6 dB	-
1 GHz - 6 GHz	± 0.8 dB	± 0.5 dB	± 0.4 dB	± 0.8 dB	± 0.5 dB	± 0.4 dB
6 GHz - 16 GHz	-	-	-	± 0.7 dB	± 0.5 dB	± 0.4 dB
16 GHz - 18 GHz	-	-	-	± 0.7 dB	± 0.5 dB	± 0.4 dB
<b>- 20 dB SIDELOBES ACCURACY</b>						
0.8 GHz - 1 GHz	± 3.0 dB	± 1.0 dB	-	± 3.0 dB	± 1.0 dB	-
1 GHz - 6 GHz	± 2.4 dB	± 0.8 dB	± 0.5 dB	± 2.4 dB	± 0.8 dB	± 0.5 dB
6 GHz - 16 GHz	-	-	-	± 2.2 dB	± 0.7 dB	± 0.5 dB
16 GHz - 18 GHz	-	-	-	± 2.2 dB	± 0.7 dB	± 0.5 dB
<b>- 30 dB SIDELOBES ACCURACY</b>						
0.8 GHz - 1 GHz	-	± 3.0 dB	-	-	± 3.0 dB	-
1 GHz - 6 GHz	-	± 2.4 dB	± 0.8 dB	-	± 2.4 dB	± 0.8 dB
6 GHz - 16 GHz	-	-	-	-	± 2.2 dB	± 0.7 dB
16 GHz - 18 GHz	-	-	-	-	± 2.2 dB	± 0.7 dB

\* Specifications given according to the following assumptions:

- Controlled temperature and humidity during measurement
- Specifications on radiation pattern are given for a normalized pattern
- Measurements inside an anechoic chamber

- Peak gain is given for a ± 0.3 dB of gain error on the reference antenna

- DUT phase center does not exceed 15 cm from arch center
- Measurement performed with a suitable mast depending on the load and directivity of the DUT

\*\* No oversampling, no averaging

## Mechanical characteristics\*

	SG 32 - 6 GHz	SG 32 - 18 GHz
Probe array diameter (int/ext)	1.5 / 2.5 m	1.5 / 2.5 m
Shielded anechoic chamber size		3.5 x 3.5 x 2.7 m / 3.5 x 3.5 x 2.7 m
Angle between probes in the same frequency band	10.59°	10.59°
Azimuth accuracy	0.02°	0.02°
Azimuth max. speed	30°/s	30°/s
Oversampling capability	Yes	Yes
<b>DUT MAX. WEIGHT</b>		
Styrofoam mast	50 kg	50 kg
Ultra rigid mast	200 kg	200 kg

\* Centered load without oversampling

## RF equipment characteristics

Number of probes	31 + 1 ref. channel	31 + 1 ref. channel (6 GHz) and 30 + 1 ref. channel (18 GHz)
Frequency range	650 MHz to 6 GHz	650 MHz to 18 GHz

**Maximum diameter of the DUT (m)**

FREQUENCY (GHz)	NUMBER OF OVERSAMPLING				
	x 1	x 2	x 3	x 5	x 10
0.8	0.75	0.75	0.75	0.75	0.75
1	0.75	0.75	0.75	0.75	0.75
2	0.81	0.84	0.84	0.84	0.84
3	0.54	0.84	0.84	0.84	0.84
4	0.41	0.81	0.84	0.84	0.84
5	0.32	0.65	0.84	0.84	0.84
6	0.27	0.54	0.81	0.84	0.84
7	0.23	0.46	0.70	0.84	0.84
8	0.20	0.41	0.61	0.84	0.84
9	0.18	0.36	0.54	0.84	0.84
10	0.16	0.32	0.49	0.81	0.84
11	0.15	0.30	0.44	0.74	0.84
12	0.14	0.27	0.41	0.68	0.84
13	0.12	0.25	0.37	0.62	0.84
14	0.12	0.23	0.35	0.58	0.84
15	0.11	0.22	0.32	0.54	0.84
16	0.10	0.20	0.30	0.51	0.84
17	0.10	0.19	0.29	0.48	0.84
18	0.09	0.18	0.27	0.45	0.84

**OTA performance testing**

SG 32 can perform both CTIA comparable TRP and TIS measurements.

**OTA performance measurement specifications\***

**ACCORDING TO CTIA SPECIFICATIONS**

TRP accuracy free space	<± 1.6 dB
TRP accuracy talk position	<± 1.7 dB
TRP repeatability	± 0.3 dB
Typical TRP measurement time**	< 90 s
TIS accuracy free space	<± 1.7 dB
TIS accuracy talk position	<± 1.8 dB
TIS repeatability	± 0.5 dB
Typical TIS measurement time***	15 min → 60 min

**CTIA COMPARABLE**

**GSM/WCDMA protocols:**

TIS based on Rx Level accuracy	<± 2.6 dB
TIS based on Rx Level repeatability	<± 1.5 dB
Typical TIS based on Rx level measurement time***	< 5 min

**CDMA2000 protocol:**

TIS optimized accuracy	<± 1.7 dB
TIS optimized repeatability	<± 0.5 dB
Typical TIS optimized measurement time***	< 10 min

\* Specifications given according to the following assumptions:

- Controlled temperature and humidity during measurement
- Measurements inside an anechoic chamber
- DUT phase center does not exceed 15 cm from arch center
- Calibration done with dipole efficiency reference values
- Measurement performed with a suitable mast depending on the load and directivity of the DUT.

Specifications also depend on Radio Communication Tester and Protocol

\*\* One channel, 15 deg sampling, one time each probe, measurement time depends on protocol

\*\*\* One channel, 30 deg sampling, one time each probe, measurement time depends on protocol