

FlashRad

A Safety Monitoring System to Detect Excessive EMF Levels



- Connected for data transfer and alarms
- Alert users with sound, light or mail
- Cover frequencies of all cellular networks including short pulsed signals
- Monitor low EMF levels in public areas
- Various power supply possibilities



Main features

User profile

- Companies situated near antennas or radar transmitters, who wish to protect their employees from questionable EMF levels (military bases, airports, etc.)
- Municipalities for measurements in public areas

Measurement capabilities

- Continuous measurement of EMF levels. Each monitor detects signals and then transmits the data to the surveillance PC to be processed individually
- Data is collected separately from each monitor in place

Frequency bands

- 700 MHz – 18 GHz; higher or lower frequencies possible

Safety recommendations

- EMF exposure limits can be defined by users and adjusted to any regulation or recommendation

Product Configuration

Software

- FlashRad software

Equipment

- External connectors (mounted on cable or not)
- Ground or wall support
- PoE

Accessories

- Case
- LEDs box with alarm + USB cable


Services

- Initial calibration
- Calibration report
- Ground or wall installation
- Training
- Additional calibration
- Extended warranty

■ Included □ Optional

FlashRad is a safety wideband exposure monitoring system that performs continuous measurements of electromagnetic field (EMF) levels. It detects all kinds of pulsed signals, including short pulsed radar, emitted from various sources outside a building. When predetermined EMF levels are exceeded, the FlashRads monitor can sound and flash a warning in its immediate surroundings while sending a signal to the surveillance PC or user (mail) for action.

Overview of FlashRad systems network

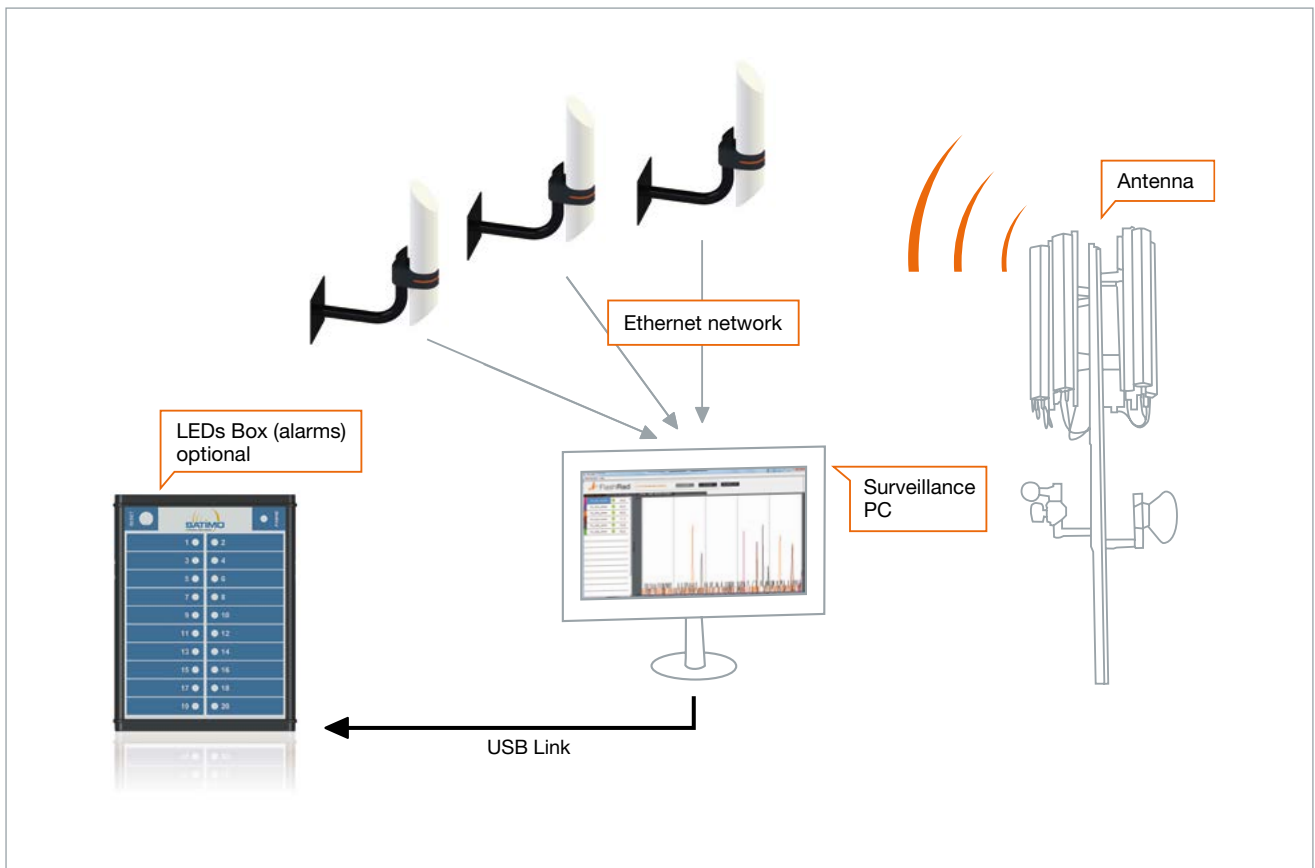

FlashRads are connected to a PC via Ethernet. Continuous EMF level measurements are sent to the PC where the FlashRad monitoring system software collects and displays the incoming data. If the FlashRads detect excessive RF levels, a signal is sent to the PC or user indicating which monitor is detecting the overexposed area. The technician can then take action. Note that each monitor can be stopped or started as necessary.

In Ethernet direct connection, the PC can send a signal to trigger the alarms in the FlashRads when the EMF levels exceed the predetermined levels.

An LED light box is available as an option to allow monitoring in multiple areas. It is connected to the PC by a USB cable of up to 10 meters.

TECHNICAL CHARACTERISTICS

	HIGH LEVEL PULSED SIGNALS (RADAR...)	WORKERS AREA (BTS, TEST...)	PUBLIC AREA
Probe reference	FR100	FR200	FR400
Probe	Isotropic 3-axes probe	Isotropic 3-axes probe	Isotropic 3-axes probe
Frequency range	700 MHz – 18 GHz	700 MHz – 6 GHz	700 MHz – 3 GHz
Lower detection limit	50 V/m	10 V/m	0.05 V/m
Upper detection limit	1000 V/m	200 V/m	100 V/m
Minimum pulse width measurement	≥ 1 µs	≥ 100 µs	≥ 10 µs

MEASUREMENT UNCERTAINTY

Axial isotropy	<ul style="list-style-type: none"> • 700 MHz – 8 GHz (@150 V/m): +/-1.5 dB • 8 GHz – 12 GHz (@150 V/m): +/-2.5 dB 	<ul style="list-style-type: none"> • 700 MHz – 6 GHz (@50 V/m): +/-1 dB • 700 MHz – 2,6 GHz (@10 V/m): +/-2 dB 	<ul style="list-style-type: none"> • 700 MHz – 3 GHz (@10 V/m): +/-2 dB
Frequency response	<ul style="list-style-type: none"> • 700 MHz – 1 GHz (@150 V/m): +/-1.5 dB • 1 GHz – 12 GHz (@150 V/m): +/-3 dB • 12 GHz – 18 GHz (@150 V/m): +10/+4 dB 	<ul style="list-style-type: none"> • 700 MHz – 2 GHz (@50 V/m): +/-3 dB • 2 GHz – 6 GHz (@50 V/m): +3/+1 dB 	<ul style="list-style-type: none"> • 700 MHz – 3 GHz (@10 V/m): +/-2.5 dB
Linearity	+/-1 dB (200 – 1000 V/m)	+/-1 dB (20 – 200 V/m)	+/-1 dB (1 – 100 V/m)

MEASUREMENT CONFIGURATION

Measurement interval	From 1 to 60 seconds
Measurement records	Yes if user configuration
Data transfer interval	From 1 to 60 seconds

CONDITIONS FOR USE

Temperature, humidity	-20 to +50°C, 90% max. humidity
Power supply	<ul style="list-style-type: none"> • 90 - 264 VAC, 47 – 440 Hz • 24 V passive PoE
Type of network connection	• Ethernet

ALARM CONFIGURATION

Programmable alarms	Field level
Trigger mode	Instantaneous or on 6 minutes mean
Transmission of alarms	By Ethernet or by mail
Audio and/or Visual alarm	Audio and/or Visual alarm if exceeding a field level threshold

MECHANICAL CHARACTERISTICS

Dimensions	Height = 570 mm Diameter = 100 mm
Weight	3.6 kg
Protection	IP 55
Installation	Ground or wall installation

SOFTWARE REQUIREMENTS

Operating system compatibility	Windows 7, 8, 10
--------------------------------	------------------

Mechanical installation



Ground Installation



Wall installation



FlashRad

MVG - Testing Connectivity for a Wireless World

The Microwave Vision Group offers cutting-edge technologies for the visualisation of electromagnetic waves. Enhancing the speed and accuracy of wireless connectivity testing, as well as the performance and reliability of anechoic and EMC technologies, our systems are integral to meeting the testing challenges of a fully connected world.

WORLDWIDE GROUP, LOCAL SUPPORT

Our teams, in offices around the world, guide and support you from purchase, through design, to delivery and installation. Because we are local, we can assure speed and attention in project follow through. This includes customer support and maintenance once the system is in place. For the exact addresses and up-to-date contact information: www.mvg-world.com/contact



Contact your local sales representative
for more information



www.mvg-world.com/rfsafety
salesteam@mvg-world.com