



TABLE OF CONTENTS

Introduction	02
Which system for which configuration?	04
1. Define your requirements	04
2. Conceptualize your configuration.	06
3. Select the subsystems	10
MVG advanced positioning	
systems	. 11
Rotary positioners	12
• Linear positioners/ Floor slides	14
 Linear positioners / X-Y-Z positioners 	15
Model towers	16
Controllers	17
Options	18
MVG - The Microwave	
Vision Group	20
MVG - ORBIT/FR	
installations around	

n	troo	UC	tion

This document encompasses a short, practical overview of MVG's positioning system product line. Inside you will find guidelines, configuration examples, brief descriptions of each product group, and a matrix of models for you to quickly locate what you may be looking for to complete or update your current antenna measurement system.

Conscious of our part in protecting the planet, we have chosen to provide datasheets for each product, with specifications and details, uniquely on line. Easy access to these online datasheets has been provided via the QR codes in the quickguides of this Overview.

We encourage you to contact our Sales team to discuss further how to determine the best match that meets your specific requirements. Our mission: to offer you the broadest choice of EMC testing and antenna measurement solutions.





FROM ORBIT/FR TO MVG

With over 30 years in the design and manufacture of advanced antenna positioning subsystems, Orbit/FR now contributes its expertise to the Microwave Vision Group (MVG), extending its know-how and participating in a full range of antenna test and measurement solutions. Today, as part of MVG, it continues to develop and innovate to meet the testing demands of an increasingly wireless and electronic driven world. From the legacy of the original positioning systems to our new low-profile, compact series, MVG continues to present quality engineered products with the most advanced technology to ensure high-grade, accurate mechanical motion, rotation, and velocity control. This broad portfolio provides customers with turn-key solutions for a variety of applications in the aerospace and defense, telecommunications, and automotive industries, as well as in antenna R&D.



GLOSSARY

RF	Radio Frequency
AZ	Azimuth
EL	Elevation
QZ	Quiet Zone
AUT	Antenna Under Test
DUT	Device Under Test
INC	Incremental encoder
ABS	Absolute encoder
Tx	Transmission mode
Rx	Reception mode
PCU	Power Control Unit
LCU	Local Control Unit
LAN	Local Area Network
GPIB	General Purpose Interface Bus
CAN	Controller Area Network

© MVG 2020

Product specifications and descriptions in this document are subject to change without notice. Actual products may differ in appearance from images shown.

Which positioning subsystem for which configuration?

Positioners, an integral part of the system

From the device to be tested to the real-estate available, several factors are to be considered when selecting equipment for a test facility configuration. The choice of the positioning subsystem to install is dependent upon these as a result. Antenna test systems are designed to perform direct measurements in far-field, direct far-field in compact range, or measurements in spherical, cylindrical, or planar near-field, possibly in combination. The directivity of the antenna to be tested determines the geometry of the measurement. Based on these geometries several configurations are feasible, however the characteristics of the DUT, the available real-estate, and measurement requirements are non-negligible determinants. Consequently, the selection of the appropriate positioning subsystem is dependent upon all of the above.





1 Define your requirements

DEVICE UNDER TEST (DUT) MECHANICAL CHARACTERISTICS


- Dimensions
- Weight
- Center of Gravity (CG)-including fixture
- Can the DUT be moved? Can it be inclined? Is the DUT self-sustaining?


I TYPE OF MEASUREMENT TO BE MADE


- Radiation pattern : omni, toroid, narrow beam, multi-beam
- Active or passive
- Frequency range
- 2D or 3D patterns, or principle cuts
- Required antenna parameter measurement accuracy: antenna pattern, beam peak, side lobe levels, gain, directivity, efficiency


ANTENNA TEST TECHNIQUE TO BE APPLIED


- Planar Near-Field
- Spherical Near-Field
- Hybrid (combined)
- RCS
- Cylindrical Near-Field
- Compact Range
- Indoor/Outdoor Far-Field
- Radome measurement














I PRE-CONDITIONS/PRE-REQUISITES

Available real-estate, available budget, schedule, available hardware (PNA, positioners), building requirements.

COMPUTING

Control room computer hardware & software - acquisition & analysis, post-processing requirements.

POSITIONING SUBSYSTEM HARDWARE SELECTION

- a) Compact Range hardware: Reflector dimensions
- b) Positioning system hardware: AZ, AZ/EL, EL/AZ, AZ/EL/AZ, Roll, Polarization, Model Tower, Combined Rotary & Linear positioning system
- c) XY Scanner hardware: scanner dimensions

To suitably support the DUT and enable measurements at all required angles with accurate characterization, the positioner selection should take into account:

- Vertical load
- Applied torque (delivered torque)
- Withstand torque
- Required angular/linear accuracy
- Indoor or outdoor application
- Required travel of each axis
- Measurement speed
- Positioning system position feedback type: absolute/incremental/synchro

Additional requirements in positioning systems: DUT alignment (PNF), feed positioners (compact range), transmit tower (FF), initialization axes, alignment positioning system.

MOTION CONTROL SELECTION

Motion controller selection considerations: One axis at a time/ simultaneous, multi-axis motion, number of axes to be controlled, required power to drive the positioner, position feedback type (incremental, absolute, or synchro encoder).

I RF ANTENNA SUBSYSTEM

Frequency range functionality: Tx, Rx, DUT ports, antenna calibration, probes, feed carousel, system power levels, RF cables, adapters, etc.

CHAMBER

Dimensions, required parts: doors, power, attenuvents, fire protection, mounting devices, absorbing materials.

ACCESSORIES


Remote control units, alignment lasers, infra-red cameras, DUT installation lifts, maintenance program.

SYSTEM CHARACTERIZATION CRITERIA


Subsystem level test plan and required results.

2 Conceptualize a configuration


Once requirements have been defined, the next step is conceptualization. Below are examples of a variety of possible positioner subsystems in different test configurations. This list is non-exhaustive. MVG provides quality, standard positioning subsystems, yet is also expert in customized solutions to meet your specific test requirements.

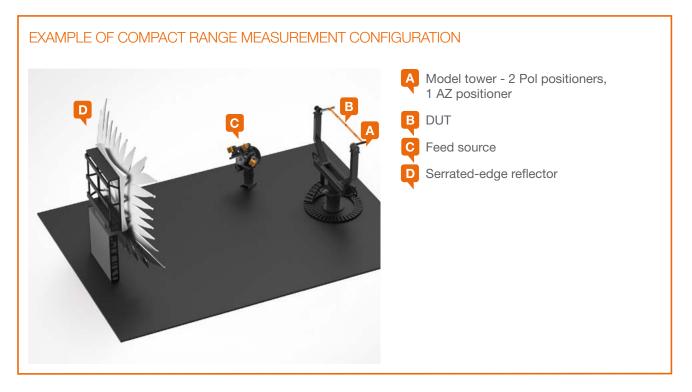

EXAMPLE OF COMPACT RANGE MEASUREMENT CONFIGURATION

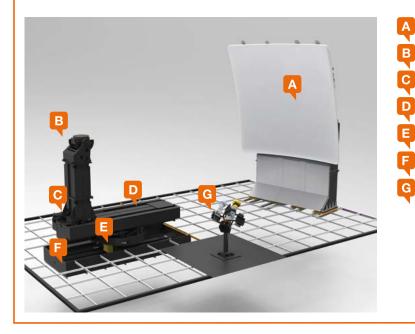




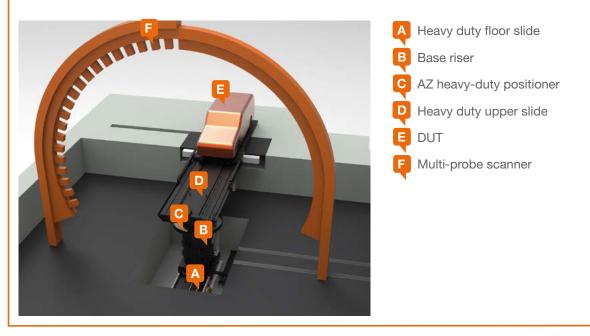


EXAMPLE OF NEAR-FIELD MEASUREMENT CONFIGURATION

EXAMPLE OF NEAR-FIELD MEASUREMENT CONFIGURATION

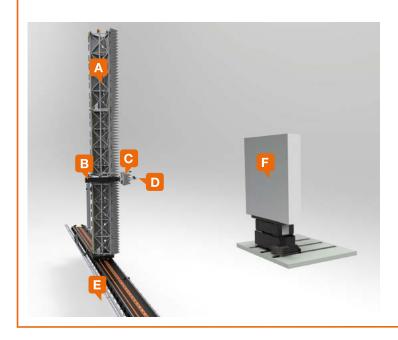


- A Y-axis positioner (scanner)
- B Z-axis positioner
- C Roll unit
- D Measurement probe
 - X-axis positioner (floor slide)
 - DUT with alignment system

EXAMPLE OF RADOME MEASUREMENT CONFIGURATION

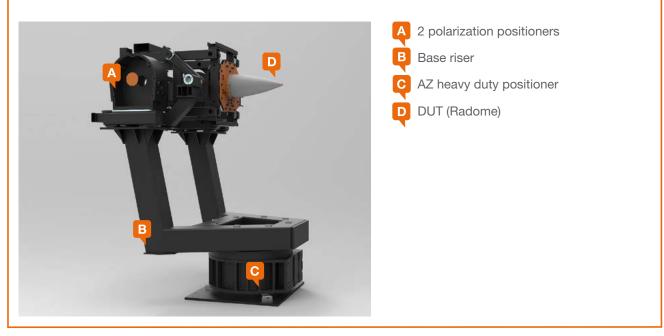


EXAMPLE OF RCS MEASUREMENT CONFIGURATIONImage: Image: Image

EXAMPLE OF NEAR-FIELD MEASUREMENT CONFIGURATION

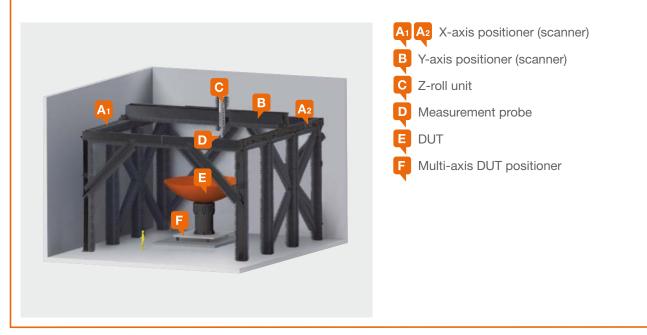

EXAMPLE OF FAR-FIELD MEASUREMENT CONFIGURATION

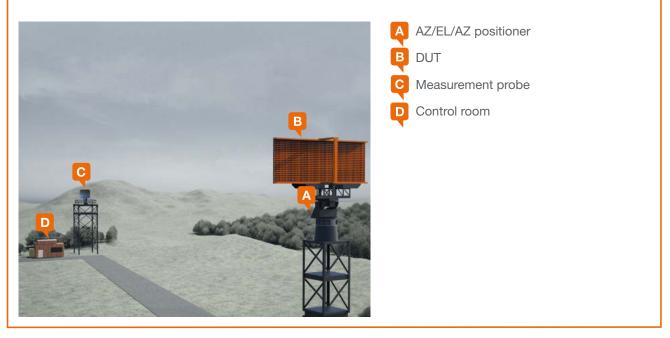



- Rotary Positioners
- Linear Floor Slides
- Model Towers
- Controllers

Once requirements are defined, and you have a conceptualized configuration, the next step is the selection of subsystems and components to be used. In the following pages, you'll find an overview of MVG positioning subsystems to guide you in your configuration & project planning.



MVG advanced positioning systems


MVG positioning systems provide the highest accuracy in motion and controllable velocity for the positioning of devices under test (DUT). Their robust and straight-forward design ensures maximum safety and reliability in operation. Fitted with DC motors, gear reducers, and high precision encoders or synchros, the systems continuously yield outstanding size and weight/ performance ratios.

MVG's advanced electromechanical technology brings additional precision to our positioning systems. Controllers with on-the-fly real-time discrete table triggering capabilities, and real time on-the-fly position correction, work with various types of feedback. Correction table service, provided by MV-Cor™, MVG patented technology, can increase accuracy by integrating geometrical error correction techniques into the systems.

Countless positioner and slide combinations are configurable for your specific test requirements.

THE POSITIONER'S ROLE IN ANTENNA MEASUREMENT

As an example, considering a spherical measurement configuration, a practical way to obtain the radiation pattern is to record the signal Areceived by the AUT through its motion in spherical coordinates (Θ, Ψ) while keeping the probe antenna stationary. Two orthogonal rotational axes are required in order to provide the relative motion of the AUT with respect to the source antenna. Figure1 illustrates these axes, OA (Θ rotational axis), and OZ (Ψ rotational axis). The AUT is located at the origin, while the source antenna is located at point S, with OS being the line of sight between them. Note that both OS and OZ are always perpendicular to OA. Moreover, to minimize radiation pattern measurement errors, the phase center of the antenna should coincide with the axes-crossing point of the positioner.

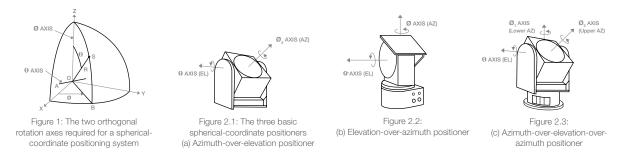

There are various positioners that provide the Θ and Ψ rotations. Figure 2 shows the most common types of positioners and their coordinate systems: (a) azimuth-over-elevation (AZ/EL), (b) Elevation-over-azimuth (EL/AZ) and (c) azimuth-over-elevation-over-azimuth (AZ/EL/AZ). In the AZ/EL positioner, the azimuth positioner provides 360° motion around the Ψ axis, while the elevation positioner provides a limited motion around the Θ axis. In the EL/AZ positioner, the elevation positioner is similar to the AZ/EL positioner, but has an extra Ψ axis for the purpose of alignment with the source antenna. The axes-crossing point of these positioners is lower than the phase center of the AUT, therefore measurement errors may be introduced. On the AZ/EL positioner, the AUT phase center is relatively closer to the axes-crossing point compared to the EL/AZ positioner, but its alignment with the source (without affecting the accuracy of the measured radiation patterns) is limited. The AZ/EL/AZ combines the advantage of both AZ/EL and EL/AZ positioners and can also be used as a polarization positioner. Depending on the antenna and the measurement probe, a polarization positioner may need to be included in the configuration. This positioner allows the probe to pivot and measure the components of the field. Polarization measurements can be performed if the source antenna (linear polarization) is assembled on a special positioner and rotated at high speed.



A WIDE SELECTION


ORBIT/FR offers a wide selection of rotary-based positioning products and various options to support the demanding needs of test ranges. Our rotary positioner solutions include industry standard single-axis and multi-axis platforms. Note that our azimuth positioners can be used as test chamber turntables such as for automotive antenna testing.*

ORBIT/FR has extensive experience in designing rotary stage positioners and high-grade positioning subsystems for a variety of applications and organizations. These designs range from heavy duty, full-size aircraft positioners to light duty specialty positioners. With the accumulated experience in specialized positioning subsystems, we also have the capacity to customize to meet your specific application needs.

PERFORMANCE AND LEGACY

For over three decades, ORBIT/FR engineers have been developing new models as market demands and customer requirements evolve. As a result, the Legacy line for which we are recognized has strengthened its base.

The Performance Series represents the latest generation of multi-axis rotary positioning subsystems, offering enhanced capabilities and improved performance relative to size. We've recently added more low-profile configurations and state-of-the art electronics while ensuring the high accuracy and precision our positioners are well-known for.

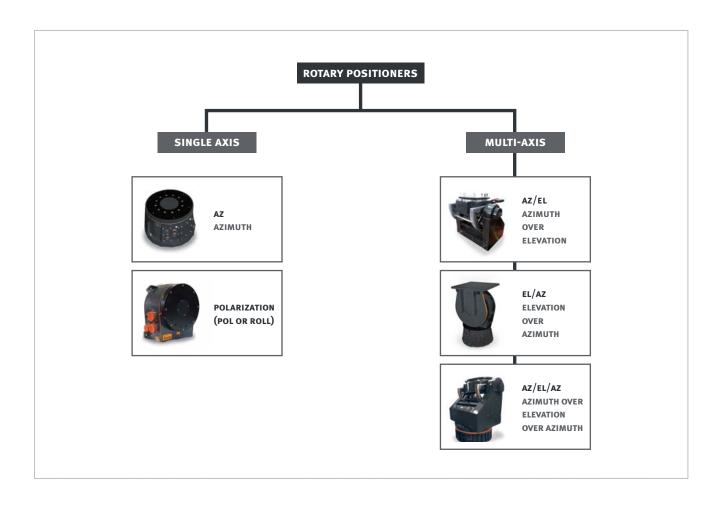

ROTARY POSITIONERS - QUICK GUIDE

		AZ ¹			AZ/EL	
Duty	LIGHT	MEDIUM	HEAVY	LIGHT	MEDIUM	HEAVY
Applications		pose positioning subs near-field antenna mea tdoor use			pose positioning subsy near-field antenna meas tdoor use	
Vertical load	5-910 kg	3990-13610 kg	22 680-250 000 kg	6-270 kg	1 000-6 000 kg	13610-20410 kg
Accuracy ²	+/- 0.03 deg	+/- 0.03 deg	+/- 0.02 deg	+/- 0.03 deg	+/- 0.03 deg	+/- 0.03 deg
Torque	1.5-50 kg-m	70-1 380 kg-m	1 380-2 490 kg-m	1.5-20/1.5-60 kg-m	70-390 /170-1 500 kg-m	390-4 150/2 765- 35 950 kg
Encoder ³	Incremental	Incremental	Absolute	Incremental	Incremental	Absolute
Datasheets						

		EL/AZ			AZ/EL/AZ	
Duty	LIGHT	MEDIUM	HEAVY	LIGHT	MEDIUM	HEAVY
Applications	 General purpose po Far-field & near-fiel measurements Indoor & outdoor u 		 General purpose positioning subsystems Far-field & near-field antenna measurements aircraft measurements Indoor & outdoor use 	-	 General purpose positioning subsystems Far-field & near-field antenna measurements Indoor & outdoor use 	 General purpose positioning subsystems Far-field & near-field antenna measurements aircraft measurements Indoor & outdoor use
Vertical load	20-91 kg	450-4 540 kg	13610-22680 kg	-	1 000-6 000 kg	12 970-18 140 kg
Accuracy ²	+/- 0.03 ou +/- 0.05 deg	+/- 0.03 deg	+/- 0.02 ou +/- 0.04 deg	-	+/- 0.03 deg	+/- 0.02 ou +/- 0.03 deg
Torque	7-20.7 / 7-20.7 kg-m	70-1 380 / 70-1 380 kg-m	830-11 060 / 2 765-35 950 kg-m	-	70-390 / 170-1 500 / 170-390 kg-m	390-4 150 / 2 770-13 830 / 390-4 840 kg-m
Encoder ³	Incremental	Incremental	Absolute	-	Incremental	Absolute
Datasheets	exie Norma Exist					

		POLARIZATION	
Duty	LIGHT	MEDIUM	HEAVY
Applications	-	-	-
Operating load	5-113 kg	1 810-9 070 kg	11 980-14 970 kg
Accuracy ²	+/- 0.04 ou +/- 0.25 deg	+/- 0.04 ou +/- 0.25 deg	+/- 0.02 deg
Torque	1.5-1.7 kg-m	70-1 380 kg-m	830-2 490 kg-m
Encoder ³	Incremental	Incremental	Absolute
Datasheets			




AZ positioners can function as test chamber turntables
 See datasheet for options
 Absolute or incremental encoders are optional for most models

Linear positioners/ Floor slides

Linear positioners provide measurement flexibility by positioning the device under test (DUT) along a linear axis. Several can be combined to to increase freedom of movement and accuracy of positioning. They are to be selected according to application, size and weight of DUT, and necessary travel distance. Their durable construction ensures maximum reliability, low deflections, and trouble-free operation.



Heavy duty floor slide with inclined positioner

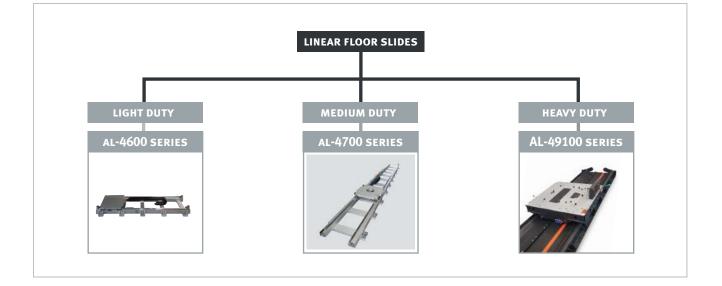

FLOOR SLIDE POSITIONERS - QUICK GUIDE

	LINEAR FLO	DOR SLIDES	
Duty	LIGHT/MEDIUM	HEAVY	
Application	Linear motion of antenna positioner assemblies, pylons, or other general purpose systems		
Vertical load	680 kg max	68 000 kg max	
Accuracy	0.2 mm	0.3-1 mm	
Speed	125 mm/sec	50-350 mm/sec	
Linear motion (motorized/manual)	Manual or motor	Motorized	
Encoder*	Incremental	Absolute	
Datasheets			


* Absolute for travel more than 3 m

Linear positioners / X-Y-Z scanners

Linear scanners are useful either for the accurate positioning of the DUT or the travel of the measurement probe during a near-field plane wave test. They are to be selected according to application, size of DUT, and necessary travel distance. The vertical, horizontal, and Z-Roll positioners can be ordered in various lengths to meet specific dimension requirements, and can be combined to increase freedom of the scan movement. Their durable construction ensures maximum reliability, low deflections, and trouble-free operation.



X-Y et Z axes configuration pour NF planar measurements

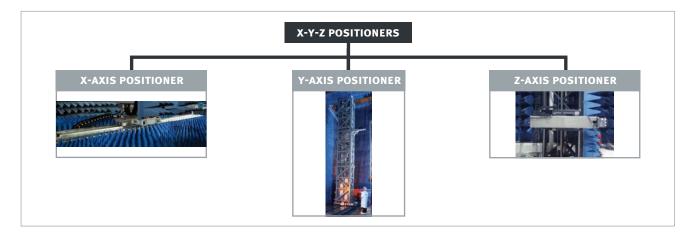

XYZ AXIS POSITIONERS - NF SCANNERS - QUICK GUIDE

	X - AXIS	Y - AXIS	Z- AXIS
Applications	Linear motion of measurement probe on X-axis	Linear motion of measurement probe on Y-axis	Linear motion of measurement probe on Z-axis
Accuracy*	0.05 mm - 0.2 mm	0.05 mm - 0.2 mm	0.03 mm
Speed	250 mm/sec	Up to 800 mm/sec	-
Travel	1-50 m	0.5-18 m	0.1-3 m
Datasheets			

* Relative to length


PLANARITY* - QUICK GUIDE

	LIGHT SERIES	MEDIUM SERIES **	LARGE SERIES	EXTRA LARGE SERIES
HSCAN				
Planarity (RMS) Uncorrected	0.05 mm	0.2 mm	0.35 mm	0.5 mm
Planarity (RMS) Corrected	0.025 mm	0.1 mm	0.2 mm	0.25 mm
TSCAN				
Planarity (RMS)	0.024 mm (up to 4x2.5 m) 0.048 mm (up to 10x7 m)	0.048 mm (up to 15x8 m) 0.13 mm (up to 50x12 m)	0.048 mm (up to 30x13 m) 0.15 mm (up to 50x18 m)	0.048 mm (up to 30x13 m) 0.19 mm (up to 50x26 m)


* Non-exhaustive data, see datasheets or contact us for details / ** tscan- medium series refs: AL-49520 (T900)

Model towers

ORBIT/FR offers a wide selection of model tower assemblies to support antenna test ranges. Model towers act as the supporting interface between the antenna under test (AUT) and the rest of the positioning subsystem. They provide polarization and linear motion. A typical model tower includes a mast (vertical or inclined) and a linear offset slide (manual or motorized). Manual linear offset slide styles include handpush, handwheel, and fixed step. Model tower assemblies may contain an integrated gearhead roll axis or a discrete roll, roll/EL or EL/roll positioner. The base plate of the model tower provides a convenient interface to the lower positioner.



Model tower positioning system in compact range

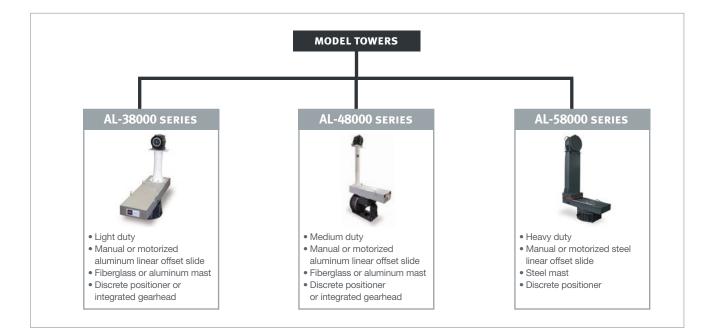

MODEL TOWERS - QUICK GUIDE

		MODEL TOWERS	
Duty	LIGHT	MEDIUM	HEAVY
Applications	• Far-	neral purpose positioning • Subsystems field & near-field antenna • Measuremen oor use	ts
Max operating load	68 kg	455 kg	8 000 kg
Max height	3 m	6 m	6 m
Max swing radius	1 000 mm	2110 mm	6 000 mm
slide standard accuracy	+/- 0.13	+/- 0.13	+/- 0.2
Mast material	Fiberglass or metal	Fiberglass or metal	Steel
Slide construction	Aluminum	Aluminum	Steel
Datasheets			


Controllers

ORBIT/FR offers a wide selection of positioner controllers, Power Control Units (PCUs), and accessories to support antenna and RCS test range needs. Our motion control solutions provide unparalleled accuracy and precision. The MVG-Orbit/FR portfolio includes both sequential and simultaneous control products. The architecture of our positioner controllers, PCUs and LCUs, provides flexibility to tailor the configurations to your requirements. Our design team has leveraged years of experience in the field, both as users and designers, to develop a generation of controllers that reflects the needs of day-to-day users. This approach has resulted in a widely popular family of controllers that are easy to use and include many practical features.



OPTIMIZE EXISTING SYSTEMS WITH UPGRADES & RETROFITS

For operators of older positioning subsystems who are exploring retrofits and upgrades, our controllers provide an excellent path to modernization and supportability. By retrofitting older-generation control systems with more up-to-date controllers, MVG can provide a cost-effective alternative to replacing an entire positioning subsystem.

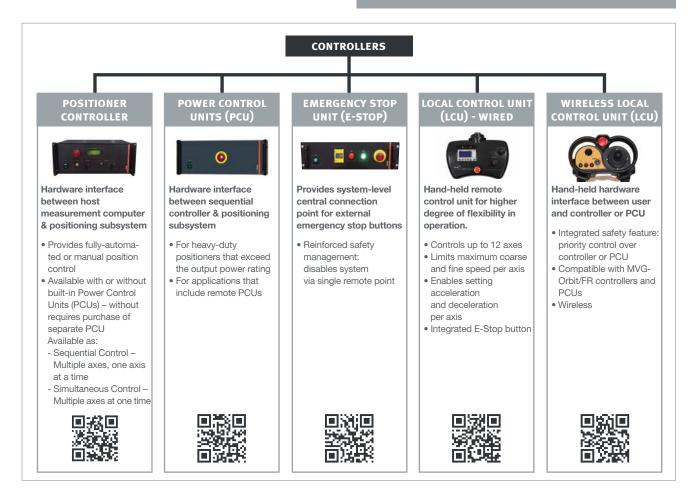

CONTROLLERS - QUICK GUIDE

			CONTROLLERS	
Model		AL-4162	AL-4164	AL-48062
N° of axes		2 axes	4 axes	6 axes
Axis control		Simultaneous	Simultaneous	Sequencial
Incr	Incremental	1	1	\checkmark
Encoder	Absolute		1 🕂	🗸 🕂
Synchro	Single			✓
Synchro	Dual			\checkmark



ENCODER OPTIONS



Encoder options are available for customers desiring high accuracy positioning or for applications involving DSP-based motion control systems. These options are offered in incremental or absolute formats and replace the standard synchro assembly.

ROTARY JOINT OPTIONS

RJ40, RJ18, RJ12, RJ50

SR402

Coaxial single-channel rotary joint options include an internal RF path, an RJ mounting flange, and appropriate RF bulkhead connectors. Electrical travel limits remain but are typically disabled when this option is purchased.

SLIP RING OPTIONS

These options support unrestricted (continuous) rotation of positioner axes. They can be ordered in two configurations: integrated wiring for upper positioner axes and/or point-to-point thru-paths for customer use. Please specify the desired configuration when ordering this option. These

options include internal wiring and MS bulkhead connectors. Electrical travel limits remain but are typically disabled when this option is purchased.

INTERNAL HARNESSING OPTION

This option supports restricted (non-continuous) rotation of positioner axes. It can be ordered in two configurations: integrated wiring for upper positioner axes and/or point-to-point thru-paths for customer use. Please specify the desired configuration when ordering this option.This option includes an internal wiring harness and MS bulkhead connectors. Electrical travel limits typically remain enabled when this option is purchased.

CONNECTOR FORMAT OPTION

These options specify available connector formats for light, medium, and heavy duty positioners. Please specify the desired configuration when ordering this option.

THRU-HOLE OPTIONS

These options provide a

protective housing through the center of selected posi-

tioner models. They are

available in either indoor

or outdoor configurations.

Applications for this option include cable pathways

and stationary fixtures

which pass through the center of the axis. Electrical



travel limits typically remain enabled when this option is purchased. Consult your local sales representative when configuring this option.

STOW-LOCK OPTIONS



avoided (ex: when mounting a vehicle). Stow-locks operate in one of two positions: stowed in housing or installed in the axis. When the stow-lock pin is removed from its housing and installed on the positioner, a special circuit breaker (normally closed – N.C.) causes an electrical shutdown to prevent operation. Stow-locks are typically installed at 0° position. Special positions are available. Consult your local sales representative when configuring this option.

LEVELING OPTIONS



Leveling options provide easy, quick and accurate leveling when installing medium and large sized positioners on uneven surfaces. They are available in varying quantities depending on the positioner model. Consult your local sales representative when configuring this option.

MOUNTING THREAD OPTIONS

These options are available for applications requiring localized configurations.



INTERLOCK PROTECTION CIRCUIT OPTIONS

Interlock circuits can be special-ordered for applications in which the design calls for preventing the operation of a specific axis while another axis is parked in a specific travel region. Applications include configurations utilizing model towers in which the interlocks are designed to prevent the model tower from colliding with a surface. Other applications include overload protection and safety work zones.

BASE-RISER OPTIONS



Base-risers can be specialordered for applications in which a positioner must be located at a specific height above its main mounting surface. They are typically the same diameter as the positioner's base and are constructed of the same material, steel or aluminum, as the positioner

itself. Some base-risers can be designed for specific applications by including features such as lifting hooks, fork lift provisions, thru-holes, hatches, and ladders. Base-risers are typically constructed in a way that does not limit the positioner's total capacity and overall specifications. Important parameters include overall capacity, diameter, and height. Consult your local sales representative when configuring this option.

WEDGE OPTIONS



Wedge options can be special-ordered for applications in which the configuration requires the positioner to be pre-tilted. Applications include downward tilt of Roll/EL positioners in which the wedge's resulting tilt shifts the elevation travel beyond its normal downward-look

angle. Wedges are constructed of the same material, steel or aluminum, as the positioner or base-riser and in a way that does not limit the positioner assembly's total capacity and overall specifications. Important parameters include tilt angle and overall height and width. Consult your local sales representative when configuring this option.

COUNTERWEIGHT OPTIONS



Counterweights can be special-ordered for applications in which the load is counter-balanced, optimizing torque and motion control. They typically vary by weight and length and are constructed of the same material, steel or aluminum, as the positioner itself. Counterweights add weight to the overall assembly and sometimes restrict travel. Important parameters include overall length, adjustable weight plates, indoor or outdoor use, and positioner configuration. Consult your local sales representative when configuring this option.

MVG - The Microwave Vision Group

From components and parts to full turn-key solutions, the right combination enables you to meet your specific measurement needs in a variety of testing configurations. Our offer allows you not only the facility of finding suitable off-the-shelf products, it also guarantees an upgrade path to enhance system capability.



MVG products are grouped into several families:

ANECHOIC CHAMBER TECHNOLOGY

- Absorbing materials: pyramidal, wedged, convoluted; standard, clean room absorbers, rubberized absorbers, HP absorbers, EMC absorbers, walkways
- Shielded chambers for Antenna Measurement and EMC:
 10, 5, 3 m chambers, MIL-STD, compact chambers, shielded doors and rooms for testing and EMI, EMC, EMPP and more

POSITIONING SUBSYSTEMS

- Positioners: Rotary and Linear positioners, Model towers
- RCS Pylons: Standard and tailored models; choice of 3 tip types: AZ/EL Hat-type, AZ/EL Low profile, AZ only
- Controllers: Positioner controllers, Power Control Units, Local Control Units

SOFTWARE

 Measurement control, data acquisition and post processing software: MiDAS, Insight, 959 Spectrum, MV-Echo, SatEnv, WaveStudio OTA measurement suite

MEASUREMENT SYSTEMS

- Multi-probe systems: Starlab, StarMIMO, SG 24, SG 64, SG 128, StarBot 4200, StarBot 4300, SG 3000 F, SG 3000 M, SG 4100 F, T-DualScan, G-DualScan, StarLab 50 GHz, MiniLab, AeroLab, StarWave
- Single probe systems: µlab, TScan, HScan
- RF system units
- Compact Ranges
- Reflectors: Serrated edge, Rolled edge

REFERENCE ANTENNAS AND MEASUREMENT PROBES

 Antennas and probes: Biconic, diagonal homs, dual polarized feeds, dual polarized OEWs, dual polarized probes, electric sleeve dipoles, feed homs, magnetic dipoles, monocones, monopoles, open quad ridge homs, closed quad ridge homs, open-ended waveguides, linear arrays, standard gain homs, wide-band homs





MVG - ORBIT/FR installations around the world





Over 30 years of engineering expertise at your service.

MVG - Testing Connectivity for a Wireless World

The Microwave Vision Group offers cutting-edge technologies for the visualisation of electromagnetic waves. Enhancing the speed and accuracy of wireless connectivity testing, as well as the performance and reliability of anechoic and EMC technologies, our systems are integral to meeting the testing challenges of a fully connected world.

WORLDWIDE GROUP, LOCAL SUPPORT

Our teams, in offices around the world, guide and support you from purchase, through design, to delivery and installation. Because we are local, we can assure speed and attention in project follow through. This includes customer support and maintenance once the system is in place. For the exact addresses and up-to-date contact information: <u>www.mvg-world.com/contacts</u>





Contact your local sales representative for more information <u>mvg-world.com/positioners</u> <u>salesteam@mvg-world.com</u>